

Made in Baden-Württemberg

Our special systems are the result of our total commitment to quality, innovative technology, years of experience and consistent further development of tried and tested systems.

Special systems

Systems tailored to your requirements

Mixing system for separating fluids with water softening installation, stainless steel water storage tank. Mini digital 3000 mixing device and circular mixing tank for continuous circulation.

Production safety:

the system has twin pumps



Made in Baden-Württemberg

Our special systems are the result of our total commitment to quality, innovative technology, years of experience and consistent further development of tried and tested systems.

Special systems

Systems tailored to your requirements

Emulsion processing system

- 2 Tanks with conical bottoms
- 2 Oil separators type 5404
- 2 Probe skimmers (length 800 mm)
- 1 Disinfection system





Special mixing device
with integrated
static mixer.

Hydraulic capacity:
up to 100 m³/h

Pressure boosting station
with Mini digital 3000 mixer

Special systems

Unusual requirements – functional solutions

Dispensers for various oils with Mini digital 1500 mixer



Antifreeze mixing system with digital mixing ratio monitoring (nominal/actual value comparison).

Control panel with touch screen.




Special systems

Tailored to suit your specific requirements

Emulsion processing system with band filter
oil separator, circular feed tank for continuous
circulation, disinfection and cooling
systems.



System for the separation of liquids with different viscosities.

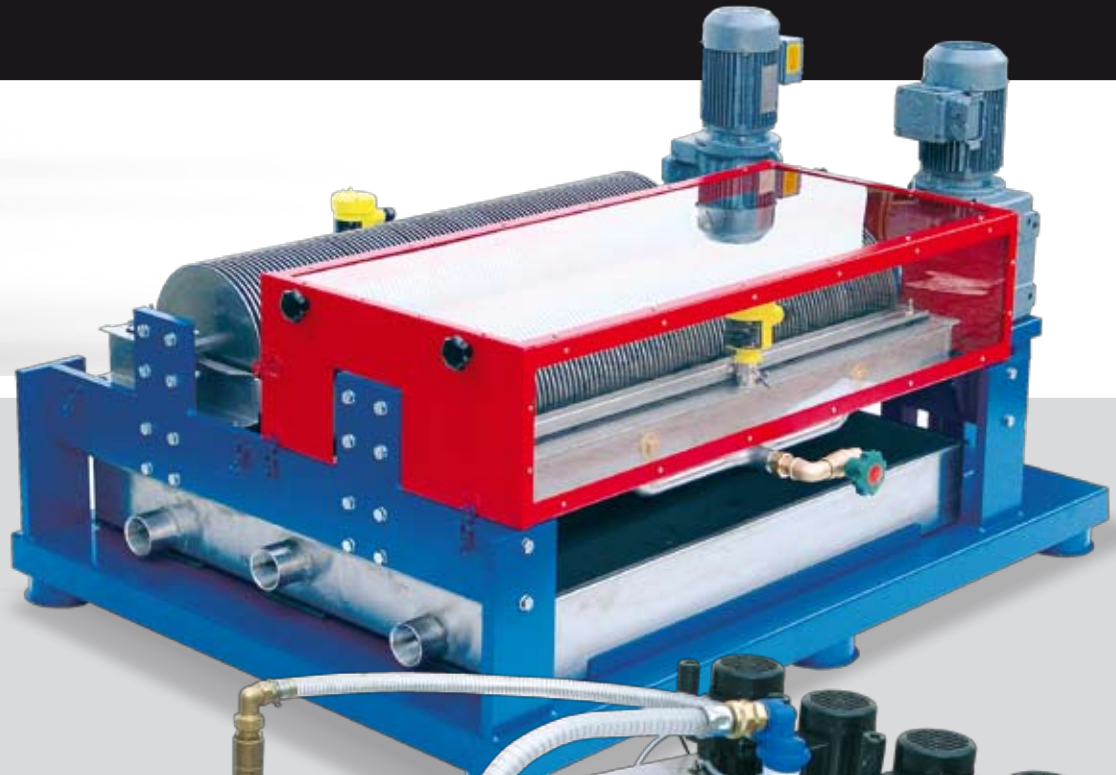

Special systems



Filter unit for
cleaning abrasive
water (mobile).

Type: Heli blue motion

Made in Baden Württemberg

Müller Gerätebau GmbH

Rangendinger Straße 35 | D-72414 Höfendorf

Phone +49 (0)7478 1516 | Fax +49 (0)7478 1710

info@mueller-geraetebau.de | www.mueller-geraetebau.de



Special systems

Optimal solutions for your applications

Mobile testing and filling system for internal combustion engines for the automotive industry.

Test pressure:

-20 mbar absolute, +1.5 bar

Test time adjustable

Filling medium:

Water/Glysantin
mixture

